


Dimensions

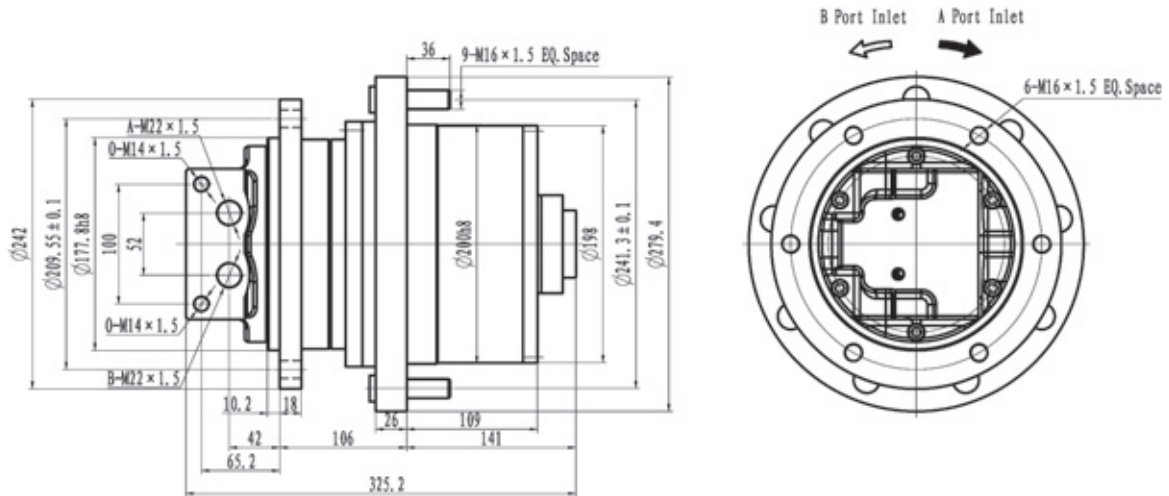

Specification

| Output Torque (N · m) | | Ratio | Brake | | | Hydraulic Motor | | | |
|-----------------------|------|--------|-----------------------|-----------------------|--------------------|-----------------------------|-----------------------------|---------------------|------------------|
| Continuous | Max. | | Static Torque (N · m) | Initial Release (MPa) | Full Release (MPa) | Large Displacement (ml/rev) | Small Displacement (ml/rev) | Max. Pressure (MPa) | Max. Speed (rpm) |
| 1690 | 3381 | 47 | 151 | 1.0 | 1.6 | 21 | 10 | 28 | 3000 |
| | | 25.775 | 151 | | | | | | |

1. The product can be fitted with KC/LC series plug-in hydraulic motor from Sauer-Danfoss.
2. The product can be used in closed loop system.
3. The product is equipped with a mechanical disconnecting device for being towed without damaging if necessary.

Hydraulic Diagram

